Sony Professional Plasma, LCD and Solutions Cut-Sheet

Rev 10/6/2005

	FWD-32LX1R	FWD-40LX1	FWD-42LX1	FWD-50PX2	PFM-42X1	FWD-42PV1
	32" LCD	40" LCD	42" LCD	50" Plasma	42" XGA Plasma	42" WVGA Plasma
Dimensions (in) (WHD)	31.6 x 19.4 x 4.3	39.2 x 23.9 x 4.9	40.6 x 24.3 x 4.9	49.5 x 29.7 x 4.4	40.7 x 24.9 x 4.1	40.7 x 24.9 x 4.8
Dimensions with Speakers(in) (WH	38.9 x 19.4 x 4.3	46.6 x 23.9 x 4.9	48.1 x 24.3 x 4.9	56.8 x 29.7 x 4.4	48.4 x 24.9 x 4.1	48.1 x 24.9 x 4.8
Weight	38.5 lbs	60.5 lbs	62.7 lbs	96.8	65.4 lbs	63.8 lbs
Power Consumption (Typical)	150W	220W	240W	440W	400W	260W
Carton Dimensions (WHD)	38.6 x 25.7 x 14.4	45 x 29 x 13.2	47.6 x 31.5 x 14.4	55 x 37.8 x 15	45.5 x 29.75 x 15	45.2 x 31.0 x 13.5
Shipping Weight	50.16 lbs	77.9 lbs	80.3 lbs	114.4 lbs	90.6 lbs	81.6 lbs

	EBS-N100	EBS-N200	EBS-SP10	BKM-FW31
	Network Mgnt	Network Streaming	Tuner / Hospitality	Network Mgnt
Dimensions (in) (WHD)	4.2 x 1.3 x 4.1	7.0 x 2.0 x 7.0	7.3 x 0.96 x 4.18	5.38 x 1.19 x 3.623
Weight	0.82 lbs	2.0 lbs	0.8 lbs	4 oz
Power Consumption	2.0 W	20.0 W	5.8 W	1.0 W

Connector Panel Images

FWD-32LX1R Left Side

Rear

Front

FWD-42LX1, FWD-40LX1, & FWD-50PX2 Left Side

Rear

Front

FWD-40LX1 & 50PX2 option slot 2 is blank

PFM-42X1 Bottom

Rear

Front

PFM-42V1 Bottom

Rear

Front

FWD-42PV1 Bottom

Rear

Front

Bottom **Slot1** **FWD-42PV1 Left Side** **Slot 2** **Top**

Rear

Front

Option Boards

BKM-V11 & BKM-FW11



BKM-V12 & BKM-FW12



BKM-FW31 & BKM-FW32

V = V & X series; FW = FWD series

Minimum spacing between the edges of the unit and other walls using the optional SPM-TRI/C

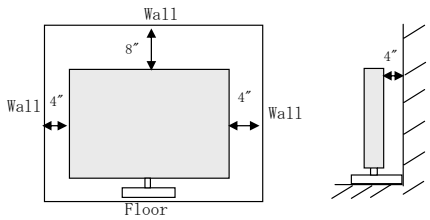

Minimum spacing between the edges of the unit and other walls using an optional wall mount



Horizontal Display



Vertical Display